

CONSTRUCTION EQUIPMENT

ALLRENT
service

SUNWARD
INNOVATION LEADS TO VALUE

COMPACT TRACK LOADER
SWTL 4538

Engine Power: **55.4 kW**

Machine Weight: **4 400 kg**



Rated Operating Capacity: **1 200 kg**



TECHNICAL PARAMETERS

SWTL 4538		
PERFORMANCE	Operating weight	4 400 kg
	Rated operating capacity	1 200 kg
	Tipping load	3 430 kg
	Breakout force curl	3 385 kg
	Breakout force lift	2 600 kg
	Travel speed	7.8/13 km/h
DIMENSIONS	Overall dimension (L × W × H) (standard bucket)	3 750 × 2 015 × 2 071 mm
	A Maximum overall height	4 079 mm
	B Bucket pin height at maximum lift	3 222 mm
	C Height to top of cab	2 071 mm
	D Height to bottom of level bucket	3 044 mm
	E Length without bucket	2 969 mm
	F Length with bucket on ground	3 750 mm
	G Maximum dump angle	44 deg
	H Clearance at maximum lift and dump	2 467 mm
	I Reach at maximum lift and dump	891 mm
	J Rack back angle bucket on the ground	30 deg
	K Rack back angle at maximum height	97 deg
	L Track length on the ground	1 600 mm
	M Ground clearance	228 mm
	N Departure angle	34 deg
	O Turning radius from center - Coupler	1 368 mm
	P Turning radius from center - Bucket	2 253 mm
	Q Turning radius from center - Machine rear	1 744 mm
	R Bumper overhang behind rear axle	855 mm
	S Width over tires	1 950 mm
	T Bucket width	2 015 mm
ENGINE	U Track length	2 100 mm
	Brand	KUBOTA
	Model	V3307-CR-TE5B
	Type	Diesel, 4 cylinders, water cooled
	Emission rating	EU Stage V
	Output	55.4/2 600 kW/rpm
TRACK	Max torque	265/1 500 N*m/rpm
	Type	Rubber track
ELECTRICAL SYSTEM	Rubber shoe width	450 mm
	Starter	12V/3.0 kW
	Alternator rating	12V/80A
HYDRAULIC SYSTEM	Battery	120 Ah
	Hydraulic flow (standard)	90 L/min
	Hydraulic flow (high)	130 L/min
HYDRAULIC OIL TANK CAPACITY	Max. hydraulic pressure	21 Mpa
		40 L
FUEL TANK CAPACITY		90 L

DIMENSIONS

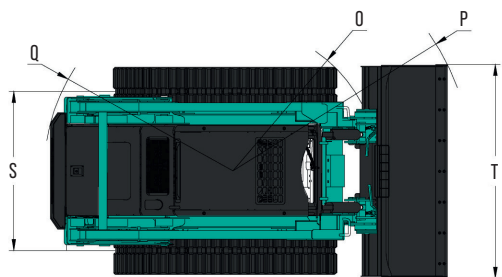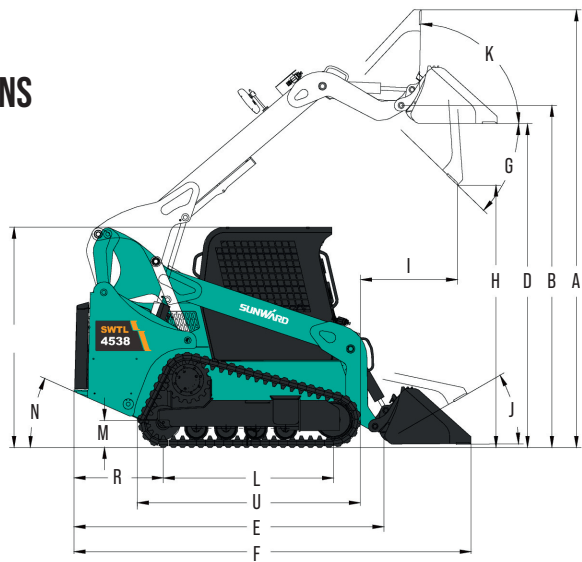

EQUIPMENT

THE STANDARD AND OPTIONAL EQUIPMENT VARIES FROM COUNTRY TO COUNTRY. FOR MORE INFORMATION, PLEASE CONTACT US.


		STANDARD EQUIPMENT	OPTIONAL EQUIPMENT
CAB	FOPS/TOPS cab	•	
	Safety armrest	•	
	Adjustable seat	•	
	Mechanical suspension seat		•
	Centralized panel	•	
	Double accelerator control system	•	
	Pilot control operating system	•	
	Fan heater	•	
	Air conditioning		•
	Lift cylinder safety bar	•	
FRONT WORKING DEVICES	Standard quick coupler	•	
	Standard bucket	•	
	Four-in-one bucket		•
	Pallet fork		•
	Solid tires		•
HYDRAULIC SYSTEM	Boom emergency descent	•	
	Hydraulic float level system	•	
	Closed hydrostatic travelling system	•	
	Standard or high flow hydraulic system	•	
	Lift cylinder safety bar	•	
	2-speed		•
ELECTRICAL SYSTEM	Front LED working light	•	
	Warning beacon light	•	
	Travelling alarm system (backward)	•	
	Horn	•	
	External power supply		•
	Attachment electronic control system		•
	Rear LED working light		•
OTHERS	Additional counter weight		•

WORK TOOLS



Sunward has one or more dealers
in each of these  countries.

Please check our website for our current list of dealers.

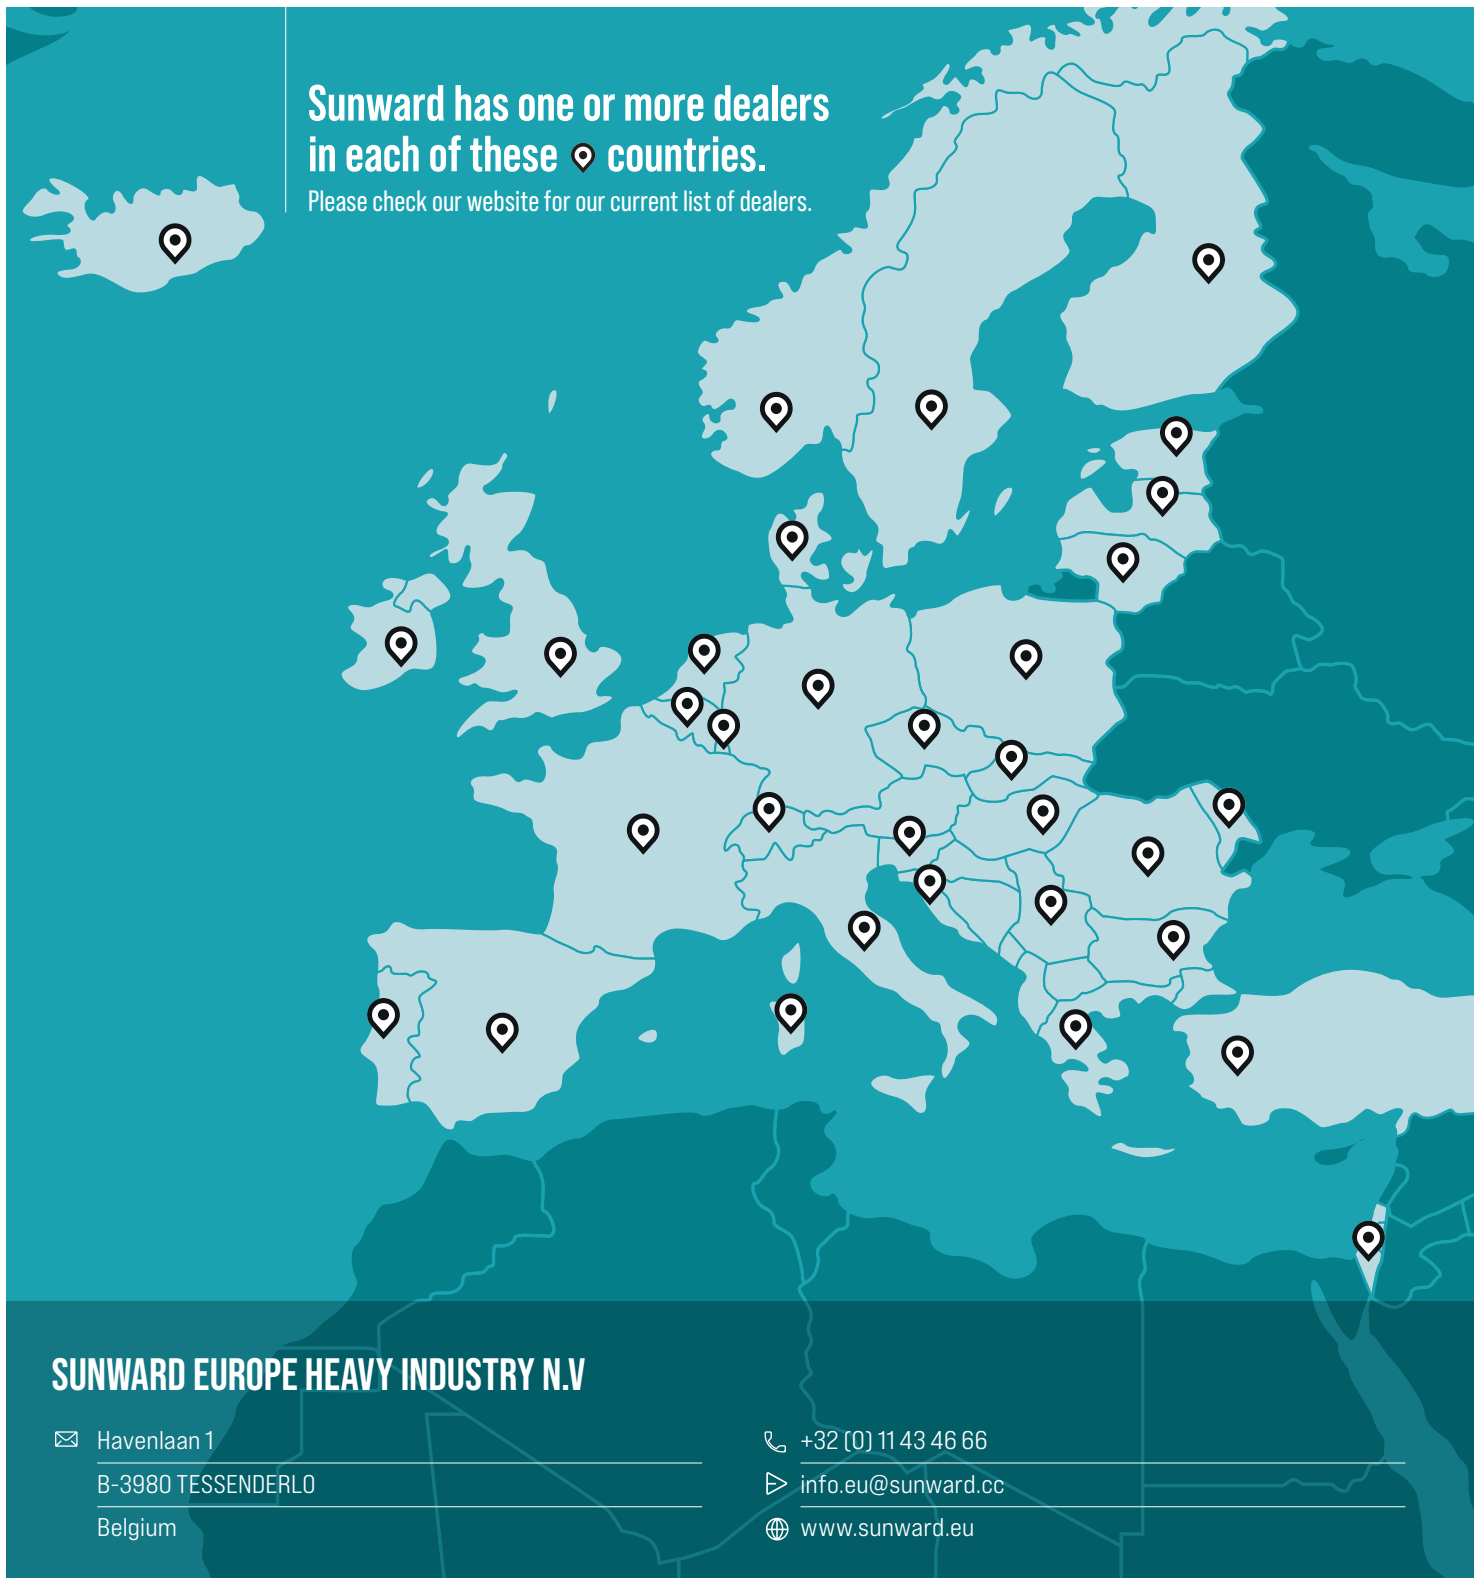

SUNWARD EUROPE HEAVY INDUSTRY N.V

✉ Havenlaan 1
B-3980 TESSENDERLO
Belgium

☎ +32 (0) 11 43 46 66

▶ info.eu@sunward.cc

🌐 www.sunward.eu

DEALER CONTACTS

